



FDT181C Collective Heat Detector Product Manual

Overview

The heat detector FDT181C is a collective detector. It is used for fire detection inside a building and particularly suitable for use in places where other types of detectors are not suitable because they can be misled by the smoke, dust and gas generated during work there.

Characteristics

- Operation modes: A2
- Collective detector, no address setting, polarity free connection
- 360° visible alarm indicator
- Resistant to environment and interference factors such as humidity, corrosive and vibration, with immunity against electro-magnetic interference.

Application

- Communication with FC18 controller via FDCI183 transponder, each FDCI183 can connect max. 32 collective detectors.
- Communication with FC720 controller via FDCIO223-CN transponder, each FDCIO223-CN can connect max. 32 collective detectors.
- Communication with FS1120 controller via FDCIO223-CN transponder, each FDCIO223-CN can connect max. 32 collective detectors.
- Communication with BC80 controller via BDS161 transponder, each BDS161 can connect max. 10 collective detectors.

Indicator

The detector is provided with an internal alarm indicator to show its operating status.

Status	Indicator
Normal	Off
Alarm	Steady on

Installation


• Easy and time-saving mounting

Install the base and finish the wiring during the construction phase.

1. Insert detector into base and turn it clockwise until positioning pointer on base align with positioning pointer on detector. (see below)

Uninstallation:


1. Turn it counterclockwise and pull the detector out of base.

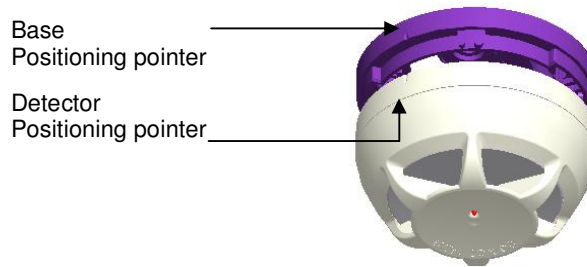


After all the construction is finished, the dust cap must be taken away!
No painting!

Dimensions

In : mm (with base)

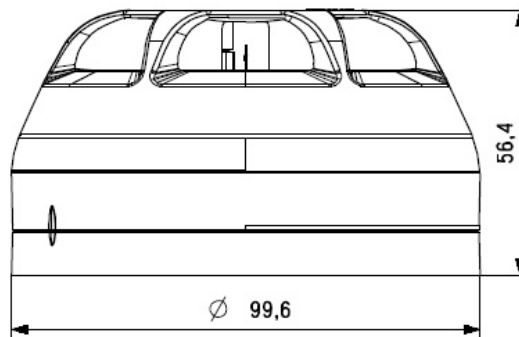

Connection diagram

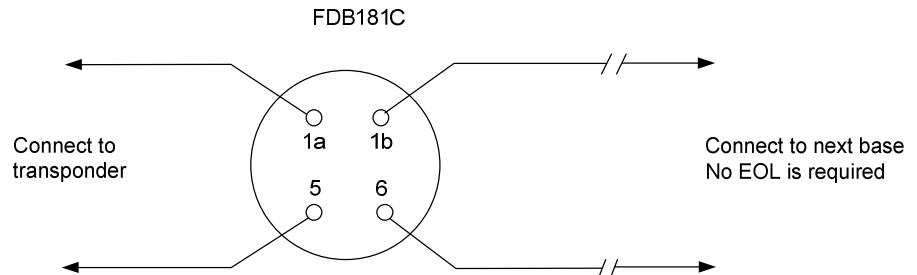

Maintenance

● Performance test

Recommendation:

- Submit all detectors to an annual visual check. Detectors that are strongly soiled or mechanically damaged must be replaced.
- Long term backup detectors should be stored with plastic bag.
- Carry out heat test each year.

Technical data

Operating voltage	10 ... 28 VDC
Operating current (quiescent)	0.1 mA
Activation current	60.0 mA
Operating temperature	-10 ... +50 °C
Storage temperature	-20 ... +70 °C
Humidity	≤96% (40±2 °C)
Communication protocol	FD18-BUS
Color	White, RAL 9010
Protection category GB4208-93	IP40

Details for ordering

Type	Material No.	Part No.	Designation	Weight
FDT181C	S54320-F12-A2	101190983	Collective heat detector	0.065Kg
FDB181C	S54320-F9-A2	101190980	Collective detector base	0.038Kg

Beijing Siemens Cerberus Electronics Limited
No.1,Fengzhidonglu, Xibeiwang, HaiDian District,
Beijing, 100094, China
Tel: +10 6476 8806
Fax: +10 6476 8899

© Data and design subject to change without notice.